



Kit includes : Base unit, 3 piece bungee pole, top rail and carry bag

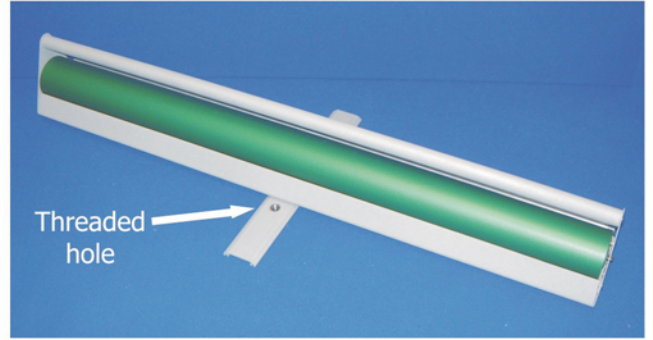


Open out the stabilising foot from the base unit
(Ensure the threaded hole is on the rear side of the base)

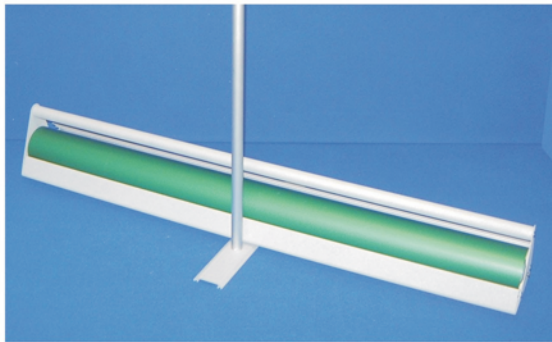

Assemble the bungee pole and fasten into the stabilising foot



Finally locate the pole into the rail slot
Take care when lowering banner (do not drop)
to prevent damage to the graphic

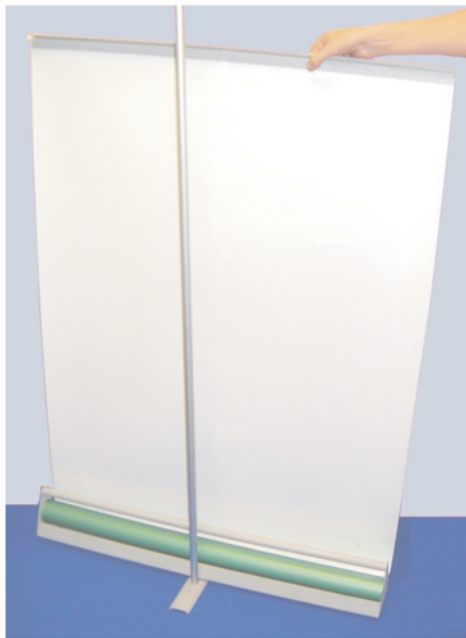

Lean the bannerstand backwards and extend the graphic by pulling up the top rail

Technical Specification

Visible graphic area : 2000mm (H) x 800mm (W)

Note : Add 200mm to the graphic length to allow for the roller
Unit weight inc. carry bag : 3.25kg approx

Guidelines for Graphic substrates

- 1, Material thickness must be between 225 and 300 microns in total
- 2, The substrate must be pliable and suitable for roller bannerstands
- 3, After fitting, the graphic should be left for 24 hours before use to ensure the adhesive bonds sufficiently



A spare locking key can be found on the base of the unit for use when changing banners
Refer to separate instruction sheet UI099